




Shock Fuse Indicator

This single use one direction impact indicator is designed with one set of spring-loaded steel balls that become dislodged and fall into transparent dome when struck with an impact that exceed the preset g-level. The g-level is set at the factory and cannot be changed when shipping.

- Low cost and easy to use.
- Perfect for monitoring small products in shipments that are delicate.
- Shows end user if any mishandling occurred in transportation chain.
- An indication to inspect product for any damage.

Shock Fuse Specifications

Length:	3/4 in.	1.9 cm
Diameter:	7/16 in.	1.1 cm
Weight:	2 grams	
Temp:	-40°F + 150°F	-40°C to 66°C
Mounting:	Self-adhesive	
"g" Range	Available in 50g-150g in 10g increments. Also available in 200g and 225g.	

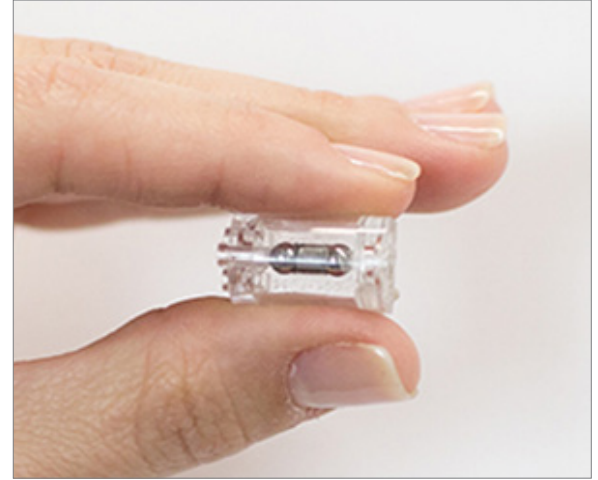

Part number: 1300-050G through 1300-225G



Easy Installation and Operation

1. Remove manufacturing plug.
2. It can be mounted within the product box or can be affixed one or more sensitive points on the product itself.

Impact-O-Graph Devices has a complete line of products for your transportation monitoring needs.

Visit us at: www.impactograph.com.