

DIGI-SHOCK GT

Impact & Temperature Recorder



The **Digi-Shock GT** is a reusable digital shock and temperature recorder that monitors impacts up to 25g or 100g* and records temperature events.

Our mission control software (included) is easy-to-use and allows for quick and simple set-up of mission parameters. A mission summary provides the start and end date of the mission, highest and lowest temperature, with the largest impacts on each axis during a journey.

An LED visual indication displays when user-defined alarm parameters are exceeded at any time, advising users that the monitored product may have been damaged and should be inspected immediately.



Technical Specifications

Power:

A single C-Cell battery (3.6v Lithium primary) or USB cable

- Automatic battery disconnect when USB is plugged in.

- Protection circuit to prevent device damage if batteries are installed backwards

Battery Life:

6 months

Operating Temperature:

- 40°F to 140°F (battery operating range)

Memory:

Flash memory capable of more than 1 million events. Retains data in event of power loss.

Accelerometer:

± 25g or ± 100g* on the X,Y and Z axis lines. Samples 250 times per second.

Temperature:

Read 1/minute

High Efficiency LED:

Provides real time device status

Standard A-B USB cable:

For connection to PC. No special cable required to retrieve data. Encrypted data file can be e-mailed directly back to sender for review.

Physical:

5" x 3.5" x 1.5" plastic case, 8 oz with batteries installed

Optional:

Metal mounting plate, replacement lithium battery, waterproof pelican case and magnetic mount plate.

Certification:

TUV, CE & CB

Specifications subject to change without notice.

Made in the U.S.A.


Features

- Fully reusable long-life device
- Records X, Y and Z axes and temperature
- User-defined alarm levels
- LED alarm and power lights
- Simple Windows-based software for quick and easy set up and evaluation
- Software not required to retrieve encrypted data file at destination
- 25g model has higher data resolution
- Impact Duration
- Mission data can be e-mailed or downloaded directly into the software for evaluation
- Serialized identification for security
- Complete data analysis of the transportation time, with acceleration values on all axes and temperature
- Zoom feature for specific time slots evaluation
- Data export and print capabilities

Mission Software



- Mission graphs provide a detailed report of each mission. This enables customers to view every single event during a journey.
- Mission Summary provides the start and end date of the mission, plus the largest impacts on each axis during a journey.

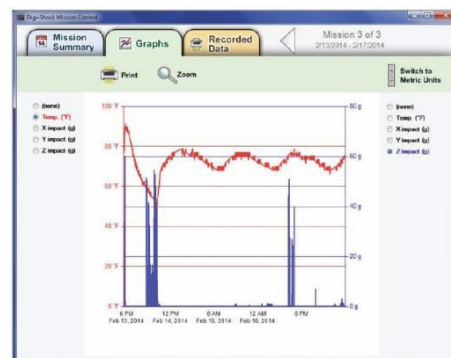

- An encrypted mission file can be downloaded and emailed without the software installed. Enables user to view the mission file (requires software) immediately without waiting for the device to be returned.
- Language Selectable using Mission Control: English, German, Spanish, Chinese, Portuguese and Japanese.
- *Optional Parameters:* Set start and stop for date and time of mission. Set alarm levels for each axis individually. Set Alarm Levels for both high and low temperatures. Set g level threshold for storing data (i.e. set at 3g to record 3g or higher events). Set delta level for temperature data storage.

*Device can be ordered with g force level up to 25g or up to 100g. The 25g provides higher data resolution.



Contact Us

IMPACT-O-GRAPH Devices
IOG Products LLC
5 Great Valley, Suite 330
Malvern, PA 19355

610.251.6963
www.impactograph.com